


DOLPHIN PLENUM RATED AIR HANDLING TIES

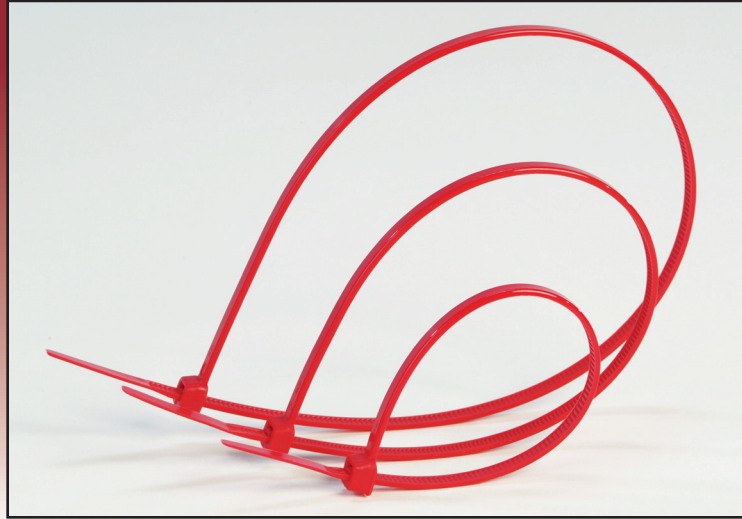

DOLPHIN COMPONENTS Plenum Rated Air Handling ties are approved for indoor use in Air Handling spaces per NFPA-1993. USA: NEC Sec. 300-22 (C) & (D) of the National Electrical Code and Canada Rules 12-010 (3), (4) & (5), & 12-20 of the Canadian Electrical Code. Made of high strength nylon, these ties are self-extinguishing and resist abrasions and chemicals such as oil, greases, solvents, dilute acids and alkalis. The DOLPHIN COMPONENTS Plenum Rated Air Handling ties are red for easy identification. The maximum operating temperature is 185°F (85°C).

Catalog Number	NAED No.	Length	Width Dia	Maximum Bundle	Color	Military Spec No.	Standard Package
DC-4AH	21491	4-1/2"	0.100	5/8"	RED	MS3367-4	100
DC-4AHM	21491	4-1/2"	0.100	5/8"	RED	MS3367-4	1000
DC-8AH	21492	7-1/2"	0.187	1-3/4"	RED	MS3367-1	100
DC-8AHM	21492	7-1/2"	0.187	1-3/4"	RED	MS3367-1	1000
DC-11AH	21493	11"	0.187	3"	RED	MS3367-7	100
DC-11AHM	21493	11"	0.187	3"	RED	MS3367-7	1000
DC-15AH	21494	14-1/2"	0.187	4"	RED	MS3367-2	100
DC-15AHM	21494	14-1/2"	0.187	4"	RED	MS3367-2	1000
SCREW MOUNT PLENUM RATED AIR HANDLING TIES							
DC-8HAH	21495	8"	0.187	2"	RED	SCREW MOUNT	100
DC-8HAHM	21495	8"	0.187	2"	RED	SCREW MOUNT	1000

DOLPHIN COMPONENTS CORPORATION

Phone or e-mail for your local distributor and/or for more technical information, catalog or samples.

1405 Poinsettia Drive • Delray Beach, FL 33444

Tel: 1.800.858.6869 • Fax: 1.888.274.2774

Email Address: sales@dolphincomponents.com

Website: www.dolphincomponents.com

© Copyright 2008

**RoHS
COMPLIANT**

**RoHS
COMPLIANT**